

DEDICATED WAX/RESIN RIBBON

Thermal Transfer Ribbon

M890 is general purpose thermal transfer ribbon with high cost performance, which is one of the customers' favorite products. It uses unique multi-component back coating technology which effectively reduces the printing noise and protects the user's printer head.



APPLICATIONS

RETAIL LABELS



SHIPPING LABELS




MEDICAL DEVICE LABELS



BUILDING MATERIAL LABELS

TECHNICAL SPECIFICATIONS

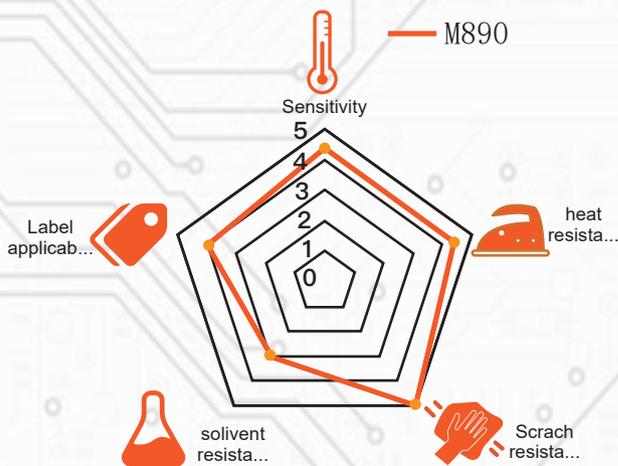

TECHNICAL CHARACTERISTICS

- Excellent scratch resistance
- Printing speed 30IPS
- Clear printing, good blackness
- Application of plastic flexible packaging products

RIBBON PROPERTIES

Ink	Wax/Resin
Color	Black
Base Film Thickness	4.5 ± 0.3
Total Thickness	6.5 ± 0.5
Ink melting point	72°C
Printing speed	2-8IPS

CERTIFICATIONS



RECOMMENDED SUBSTRATES

PAPER		ECONOMY SYNTHETICS	
Coated paper	Uncoated paper	Polyethylene	Polyolefin
Coated tag	Uncoated tag	Polypropylene	Polystyrene
Art paper		Any Other Synthetic Papers	
Rough paper			



STORAGE CONDITIONS

- 12 months recommended
- 20-85% Relative Humidity
- -5-40°C temperature

WEBSITE

MINGYOU

<http://www.mingyo.com.cn>



Add: No.33 Ma'an Road,
Tongan Rare Earth Industrial Park,
Xiamen, Fujian, CN

Tel: 86-592-7032981
E-mail: vicky-zhang@minyo-ttr.com
lily.yang@minyo-ttr.com